


# TYPE : USWS COUPLINGS

(T Cushion with Spacer)

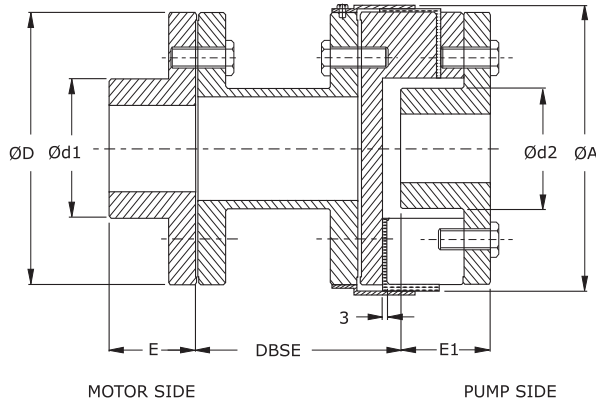


## FEATURES

- Rigid construction yet flexible
- Design made for ease in maintenance yet accommodating shaft constraints
- No down time or lost production
- No metal to metal contact
- Lubrication free
- Long life
- Maximum permissible misalignment: angular 1°, parallel 0.4 mm & axial 3 mm (initial alignment must be 25 % of maximum)

## TECHNICAL DATA

Size	Power Rating at				Dimensions in mm										
	Synthetic Rubber		Polyurethane		Motor side Bore		Pump side Bore		DBSE	ø A	ø D	ø d1	ø d2	E	E1
	Rated Torque Nm	kW @ 100 rpm	Rated Torque Nm	kW @ 100 rpm	Min. Bore	Max. Bore	Min. Bore	Max. Bore							
276	534	5.6	802	8.4	25	75	24	42	140,180	173	154	130	70	60	60
280	783	8.2	1175	12.3	30	80	28	55		208	189	130	90	65	60
295	1280	13.4	1920	20.1	30	95	28	65		253	234	160	106	80	70
2955	2139	22.4	3209	33.6	30	105	28	70		253	234	160	106	80	75
300	3046	31.9	4570	47.9	30	105	28	75		272	251	180	122	88	80
350	4298	45.0	6446	67.5	30	115	30	80		323	302	200	130	90	90

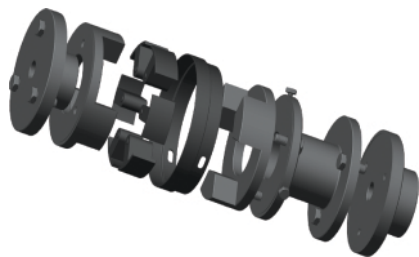

MANUFACTURED BY

**UTKUR IRON & STEEL INDUSTRIES**

Plot No. L-51, Additional M.I.D.C., Satara - 415 004. (INDIA)  
Ph.: +91 2162 240574, 240974 Fax : + 91 2162 240174

E-mail : sales@utkur.com  
website : www.utkur.com

ISSUE - 11 / May 2013



DEALER